

Pulsar WPAB panel fan



A motor used, front position of the propeller and its shape allow for generating high pressure of air. A specially designed chamber for the controller allows a fan easy connection to the electrical mains. In the PULSAR series fans, the timer and hygrostat functions are additionally enriched with the option enabling the start delay (2 minutes).

The fans are equipped with a directional propeller base optimizing the airflow stream and increasing the efficiency of its exchange.

The product package also includes a non-return valve with rigid flaps. Its task is to prevent the effect of a back draught.

PULSAR 110 EC series fans are equipped with energy-saving brushless electronically commutated motors. Compared to conventional motors, energy consumption is up to 65% lower, making the device much more environmentally friendly.

Main features:

- generates high air pressure
- rigid non-return valve made of ABS included
- ABS plastic
- ball bearings
- IP24
- maximum operating temperature 40°C
- ceiling installation allowed
- 7 years warranty

7
7 YEARS
WARRANTY



Equipment



Terminal block



Timer (start delay)



Timer (switch off delay)



Humidity sensor + timer




Backdraft valve



INDEX					
ø100	WPAB100Z	●			●
	WPAB100ZT		●	●	●
	WPAB100ZH		●	●	●
ø110 EC	WPAB110ZEC	●			●
	WPAB110ZTEC		●	●	●
	WPAB110ZHEC		●	●	●
ø110	WPAB110Z	●			●
	WPAB110ZT		●	●	●
	WPAB110ZH		●	●	●
ø125	WPAB125Z	●			●
	WPAB125ZT		●	●	●
	WPAB125ZH		●	●	●

Dimensions

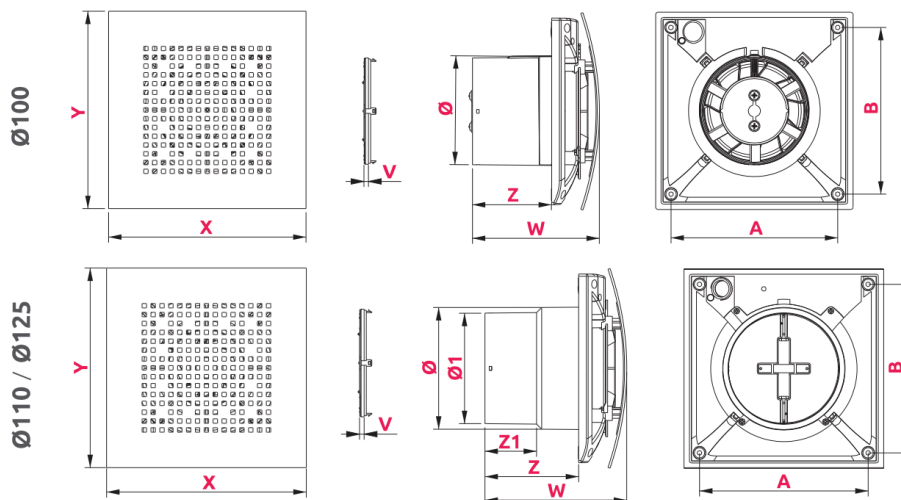

	Ø	Ø1	A	B	X	Y	W	Z	Z1	V
WPAB100	100	x	152	152	180	180	116	72	x	4
WPAB110	110	100	152	152	180	180	128	85	46	4
WPAB125	125	120	152	152	180	180	128	85	46	4